



FREIGHTLINER OF AUSTIN

1701 Smith Rd. (Hwy. 183 So.)
Austin, Texas 78721

Bus: 512-389-0000
FAX: 512-389-2663
Wats: 1-800-395-2005

INV.

PURCHASING NAME CITY OF ROUND ROCK		TELEPHONE 512-218-5571	
ADDRESS 221 E. MAIN ST		CITY ROUND ROCK	STATE TX
		ZIP CODE 78664	

I/We Hereby Purchase from You, Under the Terms and Conditions Specified, the Following:

YEAR 2022	MAKE FREIGHTLINER	MODEL/BODY M2106	VIN ORDER	LICENSE PLATE
---------------------	-----------------------------	----------------------------	---------------------	---------------

A documentary fee is not an official fee, a documentary fee is not required by law but may be charged to buyers for handling documents and performing services relating to the closing of a sale. Buyers may avoid payment of the fee to the seller by handling the documents and performing the services relating to the closing of the sale. A documentary fee may not exceed \$50.00. This notice is required by law.

El cobro documental no es un cobro oficial. El cobro documental no es un requisito bajo la ley, pero se le puede cobrar. Al comprador por el rendimiento de los servicios relacionados con la completacion de la venta y por completar los documentos. El comprador puede evitar el pago al vendedor de este costo si el comprador mismo se encarga de manejar los documentos y de los servicios necesarios para la completacion de la venta. El cobro documental no puede sobrepasar los \$50.00 (U.S.) Este aviso es requerido bajo la ley.

MILEAGE:	
TIPS CONTRACT #200206	
M2106 BASE MODEL PRICE	69,413.40
OPTION CONTENT	28,868.70
15' WARREN 13-15 YD DUMP BODY WITH ELETRIC TAPRS &	21,040.00
(2) STORBE LIGHTS RECESSED IN THE CAB PROTECTOR	
50 TON PIN TLE HITCH,	
(2) STROBE LIGHTS RECESSED IN THE REAR POST	
FREIGHTLINER OF AUSTIN DISCOUNT	\$8,000.00

Disclaimer of Warranties

Any warranties on the products sold hereby are those made by the factory. The Seller, Freightliner of Austin, hereby expressly disclaims all warranties, either expressed or implied including any implied warranty of merchantability or fitness for a particular purpose, and Freightliner of Austin, neither assumes nor authorizes any other person to assume for it any liability in connection with the sale of this vehicle.

CUSTOMER SIGNATURE	
SALESMAN SIGNATURE	KEVIN KRIEG

CONTRACTUAL DISCLOSURE STATEMENT FOR USED VEHICLE ONLY. "The information you see on the window form for this vehicle is part of this contract. Information on the window form overrides any contrary provisions in the contract of sale."

MILEAGE:	TRADE-IN
----------	----------

YEAR	MAKE	MODEL/BODY	VIN	LICENSE PLATE
------	------	------------	-----	---------------

MILEAGE:	
----------	--

YEAR	MAKE	MODEL/BODY	VIN	LICENSE PLATE
------	------	------------	-----	---------------

		TOTAL	111,322.10
PAYOFF TO:		Trade Allowance	N/A
ADDRESS:		Trading Difference	N/A
TELEPHONE: / FAX:		Sales Tax	N/A
GOOD UNTIL:		Vehicle Inventory Tax	N/A
QUOTED BY:		License Fee	N/A
SHOW LIEN TO:	Body Type:	Documentary Fee	N/A
ADDRESS:	License Wt.:	Federal Excise Tax	N/A
DATED:	LIEN AMOUNT \$	State Insp.:	TOTAL SALE PRICE 111,322.10
DRAFT FOR \$		License:	Payoff on Trade
DRAFT THRU:		Title:	Ext. Service Agreement
ADDRESS:		Transfer:	Less Deposit
		Total Balance Due	111,322.10

Full disclosure required by federal regulation "Z", The Consumer Protection Act and The Texas Consumer Credit Code, will be made prior to consummation of a credit sale. This written order comprises the entire agreement pertaining to this purchase and no other agreement of any kind, verbal understanding or promise whatsoever, will be recognized. It is expressly agreed that the purchaser acquires no right, title or interest in or to the property which he agrees to purchase hereunder until such property is delivered to him/her and either the full price is paid in cash or satisfactory deferred payment agreement is executed by the parties hereto, the terms of which shall thereafter be controlling, and a clear title is furnished to dealer for the used cars or trucks involved, if any. THIS IS NOT A CONDITIONAL SALES CONTRACT, BUT IS A BUYER'S ORDER. All new vehicles carry the standard factory warranty. It is understood there is no guarantee on the above described new or used vehicle other than appears on this Buyer's Order. Mileage, if used vehicle model is not guaranteed and a verbal agreement by the Salesman will not be considered binding on the Seller. It is agreed that neither Freightliner of Austin nor the manufacturer will be liable for failure to effect delivery. This order is not binding on the dealer until approved by an officer of Freightliner of Austin at its office in Austin, Texas

S P E C I F I C A T I O N P R O P O S A L

Description	Weight Front	Weight Rear
Price Level		
M2 PRL-23M (EFF:01/21/20)		
Data Version		
SPECPRO21 DATA RELEASE VER 039		
Vehicle Configuration		
M2 106 CONVENTIONAL CHASSIS	5,709	3,503
2022 MODEL YEAR SPECIFIED		
SET BACK AXLE - TRUCK		
TRAILER TOWING PROVISION AT END OF FRAME FOR TRUCK	10	10
LH PRIMARY STEERING LOCATION		
General Service		
TRUCK/TRAILER CONFIGURATION		
DOMICILED, USA (EXCLUDING CALIFORNIA AND CARB OPT-IN STATES)		
UTILITY/REPAIR/MAINTENANCE SERVICE		
GOVERNMENT BUSINESS SEGMENT		
DIRT/SAND/ROCK COMMODITY		
TERRAIN/DUTY: 100% (ALL) OF THE TIME, IN TRANSIT, IS SPENT ON PAVED ROADS		
MAXIMUM 8% EXPECTED GRADE		
SMOOTH CONCRETE OR ASPHALT PAVEMENT - MOST SEVERE IN-TRANSIT (BETWEEN SITES) ROAD SURFACE		
MEDIUM TRUCK WARRANTY		
EXPECTED FRONT AXLE(S) LOAD : 12000.0 lbs		
EXPECTED REAR DRIVE AXLE(S) LOAD : 40000.0 lbs		
EXPECTED GROSS VEHICLE WEIGHT CAPACITY : 52000.0 lbs		



Description	Weight Front	Weight Rear
EXPECTED GROSS COMBINATION WEIGHT : 52000.0 lbs		
Truck Service		
END DUMP BODY OX BODIES (TBEI) EXPECTED BODY/PAYLOAD CG HEIGHT ABOVE FRAME "XX" INCHES : 32.0 in		
Tractor Service		
FLATBED TRAILER SINGLE (1) TRAILER		
Engine		
CUM L9 300 HP @ 2200 RPM, 2200 GOV RPM, 860 LB-FT @ 1200 RPM	640	30
Electronic Parameters		
75 MPH ROAD SPEED LIMIT CRUISE CONTROL SPEED LIMIT SAME AS ROAD SPEED LIMIT PTO MODE ENGINE RPM LIMIT - 1100 RPM PTO RPM WITH CRUISE SET SWITCH - 700 RPM PTO RPM WITH CRUISE RESUME SWITCH - 800 RPM PTO MODE CANCEL VEHICLE SPEED - 5 MPH PTO GOVERNOR RAMP RATE - 250 RPM PER SECOND N PTO MINIMUM RPM - 700 REGEN INHIBIT SPEED THRESHOLD - 5 MPH		
Engine Equipment		
2016 ONBOARD DIAGNOSTICS/2010 EPA/CARB/GHG21 CONFIGURATION NO 2008 CARB EMISSION CERTIFICATION STANDARD OIL PAN ENGINE MOUNTED OIL CHECK AND FILL SIDE OF HOOD AIR INTAKE WITH FIREWALL MOUNTED DONALDSON AIR CLEANER DR 12V 160 AMP 28-SI QUADRAMOUNT PAD ALTERNATOR WITH REMOTE BATTERY VOLT SENSE (2) DTNA GENUINE, FLOODED STARTING, MIN 2000CCA, 370RC, THREADED STUD BATTERIES BATTERY BOX FRAME MOUNTED STANDARD BATTERY JUMPERS	10	

Description	Weight Front	Weight Rear
SINGLE BATTERY BOX FRAME MOUNTED LH SIDE UNDER CAB		
WIRE GROUND RETURN FOR BATTERY CABLES WITH ADDITIONAL FRAME GROUND RETURN		
NON-POLISHED BATTERY BOX COVER		
CAB AUXILIARY POWER CABLE	5	
POSITIVE LOAD DISCONNECT WITH CAB MOUNTED CONTROL SWITCH MOUNTED OUTBOARD DRIVER SEAT	8	
POSITIVE AND NEGATIVE POSTS FOR JUMPSTART LOCATED ON FRAME NEXT TO STARTER	2	
CUMMINS TURBOCHARGED 18.7 CFM AIR COMPRESSOR WITH INTERNAL SAFETY VALVE		
STANDARD MECHANICAL AIR COMPRESSOR GOVERNOR		
AIR COMPRESSOR DISCHARGE LINE		
ELECTRONIC ENGINE INTEGRAL SHUTDOWN PROTECTION SYSTEM		
CUMMINS ENGINE INTEGRAL BRAKE WITH VARIABLE GEOMETRY TURBO ON/OFF	20	
RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE	30	25
ENGINE AFTERTREATMENT DEVICE, AUTOMATIC OVER THE ROAD REGENERATION AND DASH MOUNTED REGENERATION REQUEST SWITCH		
10 FOOT 00 INCH (120 INCH+0/-5.9 INCH) EXHAUST SYSTEM HEIGHT		
RH CURVED VERTICAL TAILPIPE B-PILLAR MOUNTED ROUTED FROM STEP		
6 GALLON DIESEL EXHAUST FLUID TANK		
100 PERCENT DIESEL EXHAUST FLUID FILL		
LH MEDIUM DUTY STANDARD DIESEL EXHAUST FLUID TANK LOCATION		
STANDARD DIESEL EXHAUST FLUID PUMP MOUNTING		
STANDARD DIESEL EXHAUST FLUID TANK CAP		
ALUMINUM AFTERTREATMENT DEVICE/MUFFLER/TAILOPIPE SHIELD(S)		
BORG WARNER (KYSOR) REAR AIR ON/OFF ENGINE FAN CLUTCH		
AUTOMATIC FAN CONTROL WITHOUT DASH SWITCH, NON ENGINE MOUNTED		



Description	Weight Front	Weight Rear
CUMMINS SPIN ON FUEL FILTER		
COMBINATION FULL FLOW/BYPASS OIL FILTER		
FLEETGUARD PLAIN COOLANT FILTER		
900 SQUARE INCH ALUMINUM RADIATOR	15	
ANTIFREEZE TO -34F, OAT (NITRITE AND SILICATE FREE) EXTENDED LIFE COOLANT		
GATES BLUE STRIPE COOLANT HOSES OR EQUIVALENT		
CONSTANT TENSION HOSE CLAMPS FOR COOLANT HOSES		
RADIATOR DRAIN VALVE		
LOWER RADIATOR GUARD		
ALUMINUM FLYWHEEL HOUSING		
ELECTRIC GRID AIR INTAKE WARMER		
DELCO 12V 38MT HD STARTER WITH INTEGRATED MAGNETIC SWITCH		

Transmission

ALLISON 3500 RDS AUTOMATIC TRANSMISSION WITH PTO PROVISION	200	60
--	-----	----

Transmission Equipment

ALLISON VOCATIONAL PACKAGE 223 - AVAILABLE ON 3000/4000 PRODUCT FAMILIES WITH VOCATIONAL MODELS RDS, HS, MH AND TRV

ALLISON VOCATIONAL RATING FOR ON/OFF HIGHWAY APPLICATIONS AVAILABLE WITH ALL PRODUCT FAMILIES

PRIMARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY

SECONDARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY

S1 PERFORMANCE PRIMARY SHIFT SCHEDULE, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY

S1 PERFORMANCE SECONDARY SHIFT SCHEDULE, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY

2000 RPM PRIMARY MODE SHIFT SPEED

2000 RPM SECONDARY MODE SHIFT SPEED

ENGINE BRAKE RANGE PRESELECT RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE

Description	Weight Front	Weight Rear
ENGINE BRAKE RANGE ALTERNATE PRESELECT RECOMMENDED BY DTNA AND ALLISON, THIS DEFINED BY ENGINE AND VOCATIONAL USAGE		
FUEL SENSE 2.0 DISABLED - PERFORMANCE - TABLE BASED		
DRIVER SWITCH INPUT - DEFAULT - NO SWITCHES		
VEHICLE INTERFACE WIRING CONNECTOR WITHOUT BLUNT CUTS, AT END OF FRAME		
ELECTRONIC TRANSMISSION CUSTOMER ACCESS CONNECTOR FIREWALL MOUNTED		
CUSTOMER INSTALLED MUNCIE CS10 SERIES PTO		
PTO MOUNTING, LH SIDE OF MAIN TRANSMISSION		
MAGNETIC PLUGS, ENGINE DRAIN, TRANSMISSION DRAIN, AXLE(S) FILL AND DRAIN		
PUSH BUTTON ELECTRONIC SHIFT CONTROL, DASH MOUNTED		
TRANSMISSION PROGNOSTICS - ENABLED 2013		
WATER TO OIL TRANSMISSION COOLER, IN RADIATOR END TANK		
TRANSMISSION OIL CHECK AND FILL WITH ELECTRONIC OIL LEVEL CHECK		
SYNTHETIC TRANSMISSION FLUID (TES-295 COMPLIANT)		

Front Axle and Equipment

DETROIT DA-F-12.0-3 12,000# FF1 71.5 KPI/3.74
 DROP SINGLE FRONT AXLE
 MERITOR 15X4 Q+ CAM FRONT BRAKES
 NON-ASBESTOS FRONT BRAKE LINING
 CONMET CAST IRON FRONT BRAKE DRUMS
 FRONT OIL SEALS
 VENTED FRONT HUB CAPS WITH WINDOW,
 CENTER AND SIDE PLUGS - OIL
 STANDARD SPINDLE NUTS FOR ALL AXLES
 MERITOR AUTOMATIC FRONT SLACK
 ADJUSTERS
 TRW THP-60 POWER STEERING
 POWER STEERING PUMP
 2 QUART SEE THROUGH POWER STEERING
 RESERVOIR
 MINERAL SAE 80/90 FRONT AXLE LUBE



Description	Weight Front	Weight Rear
Front Suspension		
12,000# MONO TAPERLEAF FRONT SUSPENSION		
MAINTENANCE FREE RUBBER BUSHINGS - FRONT SUSPENSION		
FRONT SHOCK ABSORBERS		
Rear Axle and Equipment		
MT-40-14X 40,000# R-SERIES TANDEM REAR AXLE		2,500
5.86 REAR AXLE RATIO		
IRON REAR AXLE CARRIER WITH OPTIONAL HEAVY DUTY AXLE HOUSING		30
MXL 17T MERITOR EXTENDED LUBE MAIN DRIVELINE WITH HALF ROUND YOKES		
MXL 17T MERITOR EXTENDED LUBE INTERAXLE DRIVELINE WITH HALF ROUND YOKES		
DRIVER CONTROLLED TRACTION DIFFERENTIAL - BOTH TANDEM REAR AXLES		30
(1) INTERAXLE LOCK VALVE, (1) DRIVER CONTROLLED DIFFERENTIAL LOCK FORWARD-REAR AND REAR-REAR AXLE VALVE		
BLINKING LAMP WITH EACH INTERAXLE LOCK SWITCH, INTERAXLE UNLOCK DEFAULT WITH IGNITION OFF		
BLINKING LAMP WITH EACH MODE SWITCH, DIFFERENTIAL UNLOCK WITH IGNITION OFF, ACTIVE <5 MPH		
MERITOR 16.5X7 Q+ CAST SPIDER CAM REAR BRAKES, DOUBLE ANCHOR, FABRICATED SHOES		
NON-ASBESTOS REAR BRAKE LINING		
BRAKE CAMS AND CHAMBERS ON FORWARD SIDE OF DRIVE AXLE(S)		
CONMET CAST IRON REAR BRAKE DRUMS		
REAR OIL SEALS		
WABCO TRISTOP D LONGSTROKE 2-DRIVE AXLE SPRING PARKING CHAMBERS		20
HALDEX AUTOMATIC REAR SLACK ADJUSTERS		
MINERAL SAE 80/90 REAR AXLE LUBE		
Rear Suspension		
TUFTRAC GEN2 40,000# REAR SPRING SUSPENSION		815
9.5 INCH NOMINAL RIDE HEIGHT (460MM GLOBAL REFERENCE HEIGHT)		



Description	Weight Front	Weight Rear
AXLE CLAMPING GROUP		
55 INCH AXLE SPACING		
FORE/AFT AND TRANSVERSE CONTROL RODS		
REAR SHOCK ABSORBERS - TWO AXLES (TANDEM)		40

Brake System

AIR BRAKE PACKAGE		
WABCO 4S/4M ABS		
REINFORCED NYLON, FABRIC BRAID AND WIRE BRAID CHASSIS AIR LINES		
FIBER BRAID PARKING BRAKE HOSE		
STANDARD BRAKE SYSTEM VALVES		
STANDARD AIR SYSTEM PRESSURE PROTECTION SYSTEM		
STD U.S. FRONT BRAKE VALVE		
RELAY VALVE WITH 5-8 PSI CRACK PRESSURE, NO REAR PROPORTIONING VALVE		
BW AD-9 BRAKE LINE AIR DRYER WITH HEATER	20	
AIR DRYER MOUNTED UNDER HOOD		
STEEL AIR BRAKE RESERVOIRS		
CLEAR FRAME RAILS FROM BACK OF CAB TO FRONT REAR SUSPENSION BRACKET BOTH RAILS OUTBOARD		
PULL CABLES ON ALL AIR RESERVOIR(S)		

Trailer Connections

AIR CONNECTIONS TO END OF FRAME WITH GLAD HANDS FOR TRUCK AND NO DUST COVERS		
PRIMARY CONNECTOR/RECEPTACLE WIRED FOR SEPARATE STOP/TURN, ABS CENTER PIN POWERED THROUGH IGNITION		
SAE J560 7-WAY PRIMARY TRAILER CABLE RECEPTACLE MOUNTED END OF FRAME		
UPGRADED CHASSIS MULTIPLEXING UNIT		
UPGRADED BULKHEAD MULTIPLEXING UNIT		

Wheelbase & Frame

4825MM (190 INCH) WHEELBASE		
11/32X3-1/2X10-15/16 INCH STEEL FRAME (8.73MMX277.8MM/0.344X10.94 INCH) 120KSI	70	130
1/4 INCH (6.35MM) C-CHANNEL INNER FRAME REINFORCEMENT	130	350
1775MM (70 INCH) REAR FRAME OVERHANG		

Description	Weight Front	Weight Rear
FRAME OVERHANG RANGE: 61 INCH TO 70 INCH		
CALC'D BACK OF CAB TO REAR SUSP C/L (CA) : 124.41 in		
CALCULATED EFFECTIVE BACK OF CAB TO REAR SUSPENSION C/L (CA) : 121.41 in		
CALC'D FRAME LENGTH - OVERALL : 298.84		
CALCULATED FRAME SPACE LH SIDE : 42.77 in		
CALCULATED FRAME SPACE RH SIDE : 83.31 in		
CALC'D SPACE AVAILABLE FOR DECKPLATE : 124.45 in		
SQUARE END OF FRAME		
FRONT CLOSING CROSSMEMBER		
LIGHTWEIGHT HEAVY DUTY ALUMINUM ENGINE CROSSMEMBER	-12	
STANDARD CROSSMEMBER BACK OF TRANSMISSION		
STANDARD MIDSHIP #1 CROSSMEMBER(S)		
STANDARD REAR MOST CROSSMEMBER		
HEAVY DUTY SUSPENSION CROSSMEMBER		30
Chassis Equipment		
THREE-PIECE 14 INCH PAINTED STEEL BUMPER WITH COLLAPSIBLE ENDS	30	
FRONT TOW HOOKS - FRAME MOUNTED	15	
BUMPER MOUNTING FOR SINGLE LICENSE PLATE		
FENDER AND FRONT OF HOOD MOUNTED FRONT MUDFLAPS		
GRADE 8 THREADED HEX HEADED FRAME FASTENERS		
Fuel Tanks		
80 GALLON/302 LITER RECTANGULAR ALUMINUM FUEL TANK - LH	40	10
RECTANGULAR FUEL TANK(S)		
PLAIN ALUMINUM/PAINTED STEEL FUEL/HYDRAULIC TANK(S) WITH PAINTED BANDS		
FUEL TANK(S) FORWARD		
PLAIN STEP FINISH		
FUEL TANK CAP(S)		
DETROIT FUEL/WATER SEPARATOR WITH WATER IN FUEL SENSOR, HAND PRIMER AND 12 VOLT PREHEATER	-5	

Description	Weight Front	Weight Rear
EQUIFLO INBOARD FUEL SYSTEM		
HIGH TEMPERATURE REINFORCED NYLON FUEL LINE		
FUEL COOLER	10	
Tires		
MICHELIN XZE2 11R22.5 16 PLY RADIAL FRONT TIRES	24	
MICHELIN X MULTI D 11R22.5 16 PLY RADIAL REAR TIRES		120
Hubs		
CONMET PRESET PLUS PREMIUM IRON FRONT HUBS		
CONMET PRESET PLUS PREMIUM IRON REAR HUBS		
Wheels		
ACCURIDE 28828 22.5X8.25 10-HUB PILOT 6.18 INSET 2-HAND HD STEEL DISC FRONT WHEELS	26	
ACCURIDE 28828 22.5X8.25 10-HUB PILOT 2-HAND HD STEEL DISC REAR WHEELS		104
FRONT WHEEL MOUNTING NUTS		
REAR WHEEL MOUNTING NUTS		
Cab Exterior		
106 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB		
AIR CAB MOUNTING		
LH AND RH GRAB HANDLES		
MOLD-IN COLOR GRILLE		
MOLD-IN COLOR HOOD MOUNTED AIR INTAKE GRILLE		
FIBERGLASS HOOD		
SINGLE 14 INCH ROUND POLISHED AIR HORN ROOF MOUNTED	4	
SINGLE ELECTRIC HORN		
SINGLE HORN SHIELD		
DOOR LOCKS AND IGNITION SWITCH KEYED THE SAME		
KEY QUANTITY OF 2		
REAR LICENSE PLATE MOUNT END OF FRAME		
INTEGRAL HEADLIGHT/MARKER ASSEMBLY		
(5) AMBER MARKER LIGHTS		
INTEGRAL STOP/TAIL/BACKUP LIGHTS		



Description	Weight Front	Weight Rear
STANDARD FRONT TURN SIGNAL LAMPS		
DUAL WEST COAST BRIGHT FINISH HEATED MIRRORS WITH LH AND RH REMOTE		
DOOR MOUNTED MIRRORS		
102 INCH EQUIPMENT WIDTH		
LH AND RH 8 INCH BRIGHT FINISH CONVEX MIRRORS MOUNTED UNDER PRIMARY MIRRORS		
STANDARD SIDE/REAR REFLECTORS		
63X14 INCH TINTED REAR WINDOW		
TINTED DOOR GLASS LH AND RH WITH TINTED NON-OPERATING WING WINDOWS		
MANUAL DOOR WINDOW REGULATORS		
1-PIECE SOLAR GREEN GLASS WINDSHIELD		
2 GALLON WINDSHIELD WASHER RESERVOIR WITHOUT FLUID LEVEL INDICATOR, FRAME MOUNTED		

Cab Interior

OPAL GRAY VINYL INTERIOR		
MOLDED PLASTIC DOOR PANEL		
MOLDED PLASTIC DOOR PANEL		
BLACK MATS WITH SINGLE INSULATION		
DASH MOUNTED ASH TRAYS AND LIGHTER		
FORWARD ROOF MOUNTED CONSOLE WITH UPPER STORAGE COMPARTMENTS WITHOUT NETTING		
IN DASH STORAGE BIN		
CENTER STORAGE CONSOLE MOUNTED ON BACKWALL	20	
(2) CUP HOLDERS LH AND RH DASH		
GRAY/CHARCOAL FLAT DASH		
SMART SWITCH EXPANSION MODULE		
5 LB. FIRE EXTINGUISHER	10	
HEATER, DEFROSTER AND AIR CONDITIONER		
STANDARD HVAC DUCTING		
MAIN HVAC CONTROLS WITH RECIRCULATION SWITCH		
STANDARD HEATER PLUMBING		
VALEO HEAVY DUTY A/C REFRIGERANT COMPRESSOR		
BINARY CONTROL, R-134A		
STANDARD INSULATION		

Description	Weight Front	Weight Rear
SOLID-STATE CIRCUIT PROTECTION AND FUSES		
12V NEGATIVE GROUND ELECTRICAL SYSTEM		
DOME LIGHT WITH 3-WAY SWITCH ACTIVATED BY LH AND RH DOORS		
CAB DOOR LATCHES WITH MANUAL DOOR LOCKS		
(1) 12 VOLT POWER SUPPLY IN DASH		
TRIANGULAR REFLECTORS WITHOUT FLARES	10	
BASIC HIGH BACK AIR SUSPENSION DRIVER SEAT WITH MECHANICAL LUMBAR AND INTEGRATED CUSHION EXTENSION	30	
BASIC HIGH BACK NON SUSPENSION PASSENGER SEAT		
DUAL DRIVER SEAT ARMRESTS, NO PASSENGER SEAT ARMRESTS	4	
LH AND RH INTEGRAL DOOR PANEL ARMRESTS		
VINYL WITH VINYL INSERT DRIVER SEAT		
VINYL WITH VINYL INSERT PASSENGER SEAT		
BLACK SEAT BELTS		
ADJUSTABLE TILT AND TELESCOPING STEERING COLUMN	10	
4-SPOKE 18 INCH (450MM) STEERING WHEEL		
DRIVER AND PASSENGER INTERIOR SUN VISORS		

Instruments & Controls

GRAY DRIVER INSTRUMENT PANEL		
GRAY CENTER INSTRUMENT PANEL		
BLACK GAUGE BEZELS		
LOW AIR PRESSURE INDICATOR LIGHT AND AUDIBLE ALARM		
2 INCH PRIMARY AND SECONDARY AIR PRESSURE GAUGES		
INTAKE MOUNTED AIR RESTRICTION INDICATOR WITHOUT GRADUATIONS		
97 DB BACKUP ALARM		3
ELECTRONIC CRUISE CONTROL WITH SWITCHES IN LH SWITCH PANEL		
KEY OPERATED IGNITION SWITCH AND INTEGRAL START POSITION; 4 POSITION OFF/RUN/START/ACCESSORY		
ICU3S, 132X48 DISPLAY WITH DIAGNOSTICS, 28 LED WARNING LAMPS AND DATA LINKED		

Description	Weight Front	Weight Rear
HEAVY DUTY ONBOARD DIAGNOSTICS INTERFACE CONNECTOR LOCATED BELOW LH DASH		
2 INCH ELECTRIC FUEL GAUGE		
PROGRAMMABLE RPM CONTROL - ELECTRONIC ENGINE		
ELECTRICAL ENGINE COOLANT TEMPERATURE GAUGE		
TRANSMISSION OIL TEMPERATURE INDICATOR LIGHT		
ENGINE AND TRIP HOUR METERS INTEGRAL WITHIN DRIVER DISPLAY		
(1) DASH MOUNTED PTO SWITCH WITH INDICATOR LAMP	10	
ELECTRIC ENGINE OIL PRESSURE GAUGE		
AM/FM/WB WORLD TUNER RADIO WITH BLUETOOTH AND USB AND AUXILIARY INPUTS, J1939	10	
DASH MOUNTED RADIO		
(2) RADIO SPEAKERS IN CAB		
AM/FM ANTENNA MOUNTED ON FORWARD LH ROOF		
ELECTRONIC MPH SPEEDOMETER WITH SECONDARY KPH SCALE, WITHOUT ODOMETER		
STANDARD VEHICLE SPEED SENSOR		
ELECTRONIC 3000 RPM TACHOMETER		
IDLE LIMITER, ELECTRONIC ENGINE		
BW TRACTOR PROTECTION VALVE		
TRAILER HAND CONTROL BRAKE VALVE		
DIGITAL VOLTAGE DISPLAY INTEGRAL WITH DRIVER DISPLAY		
SINGLE ELECTRIC WINDSHIELD WIPER MOTOR WITH DELAY		
MARKER LIGHT SWITCH INTEGRAL WITH HEADLIGHT SWITCH		
TWO VALVE PARKING BRAKE SYSTEM WITH WARNING INDICATOR		
SELF CANCELING TURN SIGNAL SWITCH WITH DIMMER, WASHER/WIPER AND HAZARD IN HANDLE		
INTEGRAL ELECTRONIC TURN SIGNAL FLASHER WITH HAZARD LAMPS OVERRIDING STOP LAMPS		

Design

Description	Weight Front	Weight Rear
PAINT: ONE SOLID COLOR		

Color

CAB COLOR A: L0006EY WHITE ELITE EY
 BLACK, HIGH SOLIDS POLYURETHANE CHASSIS PAINT
 POWDER WHITE (N0006EA) FRONT WHEELS/RIMS (PKWHT21, TKWHT21, W, TW)
 POWDER WHITE (N0006EA) REAR WHEELS/RIMS (PKWHT21, TKWHT21, W, TW)
 BUMPER PAINT: FP24812 ARGENT SILVER DUPONT FLEX
 STANDARD E COAT/UNDERCOATING

Certification / Compliance

U.S. FMVSS CERTIFICATION, EXCEPT SALES CABS AND GLIDER KITS

Secondary Factory Options

CORPORATE PDI CENTER IN-SERVICE ONLY

Raw Performance Data

CALCULATED EFFECTIVE BACK OF CAB TO REAR SUSPENSION C/L (CA) : 121.41 in
 CALC'D SPACE AVAILABLE FOR DECKPLATE : 124.45 in

Sales Programs

NO SALES PROGRAMS HAVE BEEN SELECTED

TOTAL VEHICLE SUMMARY

Weight Summary

	Weight Front	Weight Rear	Total Weight
Factory Weight ⁺	7105 lbs	7810 lbs	14915 lbs
Total Weight ⁺	7105 lbs	7810 lbs	14915 lbs

Extended Warranty



Prepared by:
Kevin Krieg
FREIGHTLINER OF AUSTIN
1701 SMITH ROAD
AUSTIN, TX 78721
Phone: 512-389-0000

TOWING: 1 YEAR/UNLIMITED MILES/KM EXTENDED TOWING
COVERAGE \$550 CAP FEX APPLIES


(+) Weights shown are estimates only.

If weight is critical, contact Customer Application Engineering.

(***) All cost increases for major components (Engines, Transmissions, Axles, Front and Rear Tires) and government mandated requirements, tariffs, and raw material surcharges will be passed through and added to factory invoices.



D I M E N S I O N S

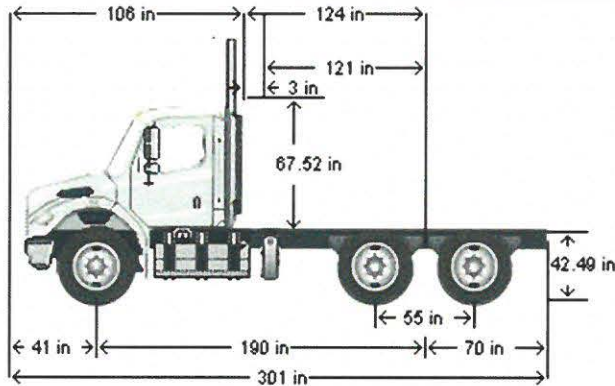

VEHICLE SPECIFICATIONS SUMMARY - DIMENSIONS

Model.....	M2106
Wheelbase (545)	4825MM (190 INCH) WHEELBASE
Rear Frame Overhang (552).....	1775MM (70 INCH) REAR FRAME OVERHANG
Fifth Wheel (578)	NO FIFTH WHEEL
Mounting Location (577).....	NO FIFTH WHEEL LOCATION
Maximum Forward Position (in).....	0
Maximum Rearward Position (in)	0
Amount of Slide Travel (in).....	0
Slide Increment (in).....	0
Desired Slide Position (in).....	0.0
Cab Size (829).....	106 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB
Sleeper (682).....	NO SLEEPER BOX/SLEEPERCAB
Exhaust System (016).....	RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE

TABLE SUMMARY - DIMENSIONS

Dimensions	Inches
Bumper to Back of Cab (BBC)	106.3
Bumper to Centerline of Front Axle (BA)	40.7
Min. Cab to Body Clearance (CB)	3.0
Back of Cab to Centerline of Rear Axle(s) (CA)	124.4
Effective Back of Cab to Centerline of Rear Axle(s) (Effective CA)	121.4
Back of Cab Protrusions (Exhaust/Intake) (CP)	0.0
Back of Cab Protrusions (Side Extenders/Trim Tab) (CP)	0.0
Back of Cab Protrusions (CNG Tank)	0.0
Back of Cab Clearance (CL)	3.0
Back of Cab to End of Frame	194.3
Cab Height (CH)	67.5
Wheelbase (WB)	190.0
Frame Overhang (OH)	69.9
Overall Length (OAL)	300.6
Rear Axle Spacing	55.0
Unladen Frame Height at Centerline of Rear Axle	42.5

Performance calculations are estimates only. If performance calculations are critical, please contact Customer Application Engineering.